We are make a export quality screw barrel with under the experienced engineer



HI-TECH SERVICES

We serve following service all over the world

- Screw design and mixer patented
- Retrofitting projects
- OEM replacement
- Bimetallic hard facing coatings & Linings
- Rebuilding & Refurbishing services with inspection
- At sight drawing service
- Erection and installation
- Turnkey project for extrusion lines



www.hi-techscrewbarrel.com

- ☑ info@hi-techscrewbarrel.com
- ☑ sales@hi-techscrewbarrel.com □ dpshitech@gmail.com





www.bimetallicscrewbarrel.com

OFFICE ADDRESS:


A/405, A-one residency, Nr. Bhavani Park, Nirant Char rasta, Vastral Ahmedabad - 382 418, Gujarat, INDIA

Call +91 90 9906 7240 | 87 5888 1684 Offices: +91 79 2585 5240

• FACTORY ADDRESS:

B/6 Revabhai Estate Part-1, Surelia Estate Road, Opp.Bhimnath Hotel, CTM, Ahmedabad-380026 Gujarat, INDIA

① Customer Care Help line - 24 x 7 : +91 90 9906 7240

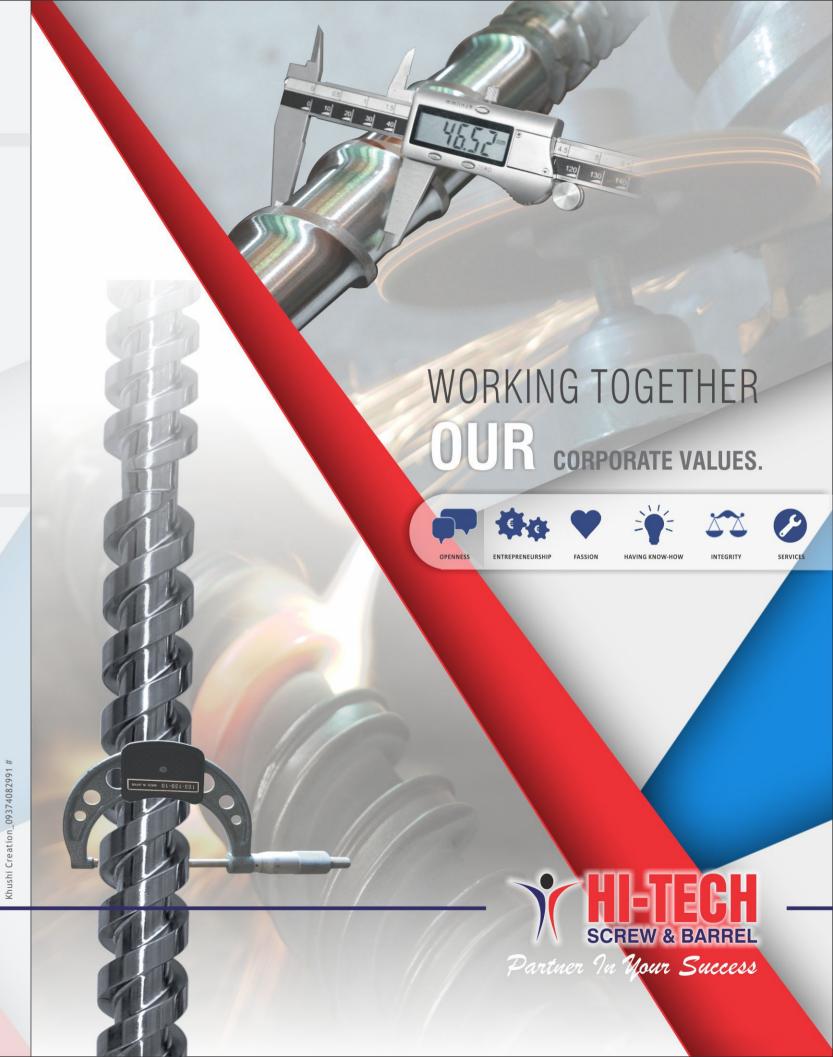



www.hi-techscrewbarrel.com www.bimetallicscrewbarrel.com



EXTRUSION SINGLE SCREW AND BARREL

Hi-Tech Extrusions manufactures single screws and barrels starting from 20 mm to 150 mm screw diameter. Length Up to 6000 mm

Grooved feed barrel

The grooved feed barrel is used for achieving high shear and better transportation of material. As Coefficient of friction between granules and screw and barrel should be higher to get proper melting of the material it's imperative to have grooved feed in the barrel for processing of polymers of olefin group.

Application:

- LDPE, HDPE, PP Film
- Raffia / Mono Filament application

Barrier screw

The barrier screw design separates melted material from unmelted solid material into separate channels. This unique mixing feature thoroughly homogenizes the melt with little or no increase in its average temperature. Mixing is achieved with an undulating root profile in the metering zone of the screw.

Application:

- LDPE/HDPE/PP/Film ABS
- PVC cable
- PVC Pipe/PVC profile

Maddoc-barrier screw


Maddoc barrier scew is used to break down particles by forcing material to flow over barrier flights, in a similar manner to barrier screws.

Application:

- HDPE Pipes
 XLPE cables
- Lay Flat PipeLDPE Tubing
- PP film
















We also offer twin screw pair which responds anticorrosion & wear resistant with high quality and high performance rate with bimetallic coating

New designed screws developed by us.

We manufacture twin screw pairs and twin barrel of all the well nown extruder making companies.

Application:

- PVC Pipe manufacture (R PVC, U PVC, C PVC)
- PVC Profile manufacture (R PVC, U PVC)

Technical Specifications / Heat Treatment Process

Toughening hardness : HB 240 to 280 Nitriding layer depth : 0.4 to 0.6

Hardness of nitride process : 65 to 72 HRC Tungsten carbide coating hardness : 70 to 75 mm

Tungsten carbide coating layer : 0.8 to 1.5 mm


Plazma or gas nitrided

PTA melt welding

HVOF thermal spray coating

Vacuun hardening D2/M2 Tool Steel Material



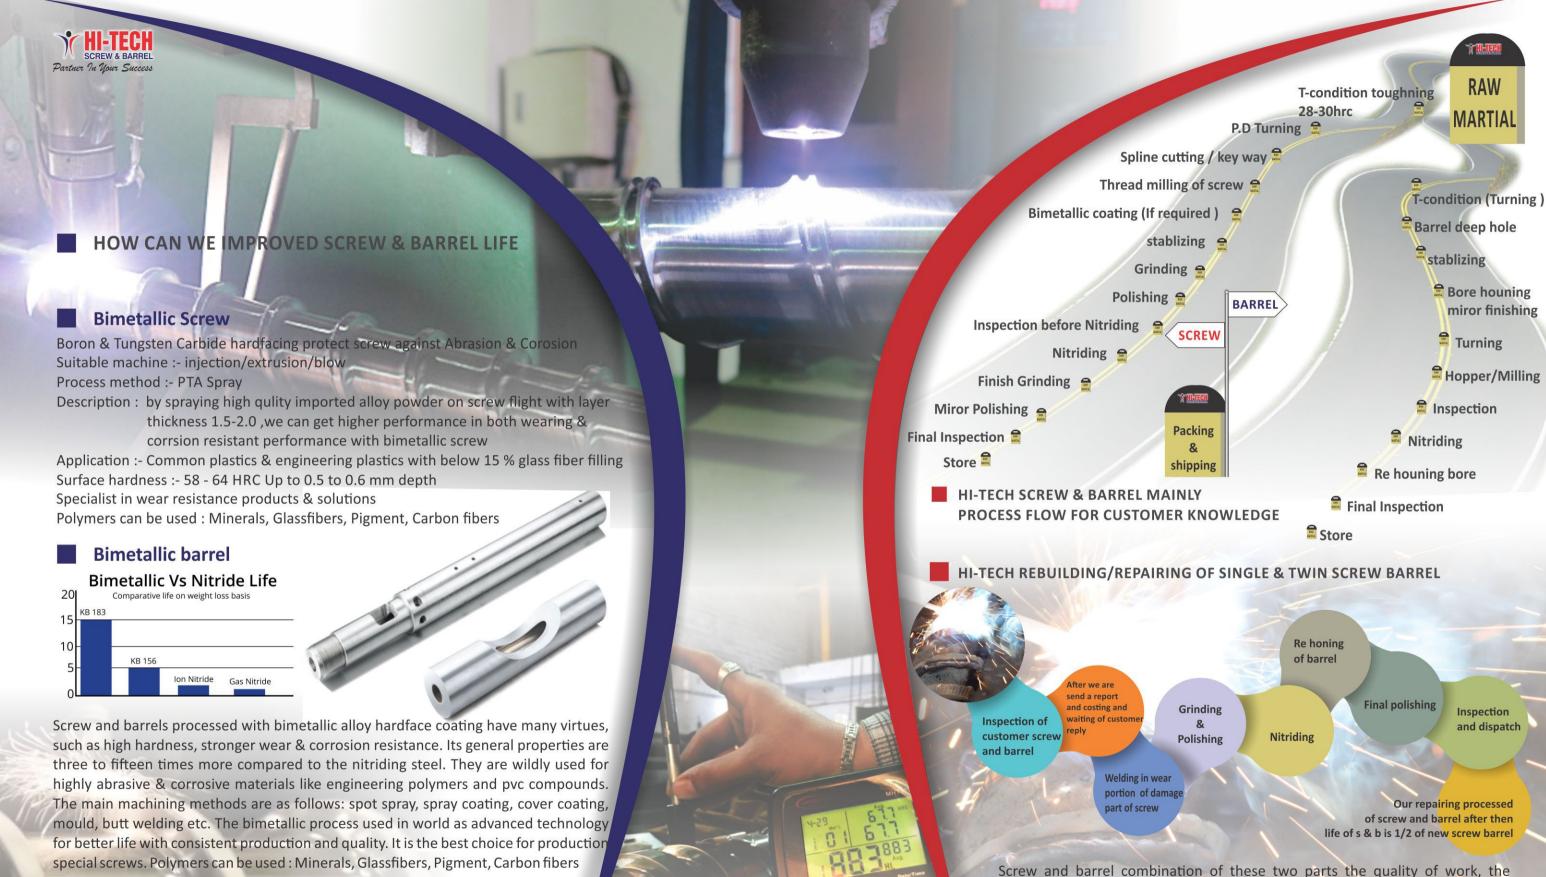

plastics materials, products quality and production efficiency, have a significant impact. Their work quality and accuracy of two parts manufacturing and assembly space related. When the 20 were badly worn extruder output decline, they should be arranged on the screw, barrel maintenance.

Inspection

and dispatch